




EMPIRE™ 

WELDING HOSE

WELDING HOSE

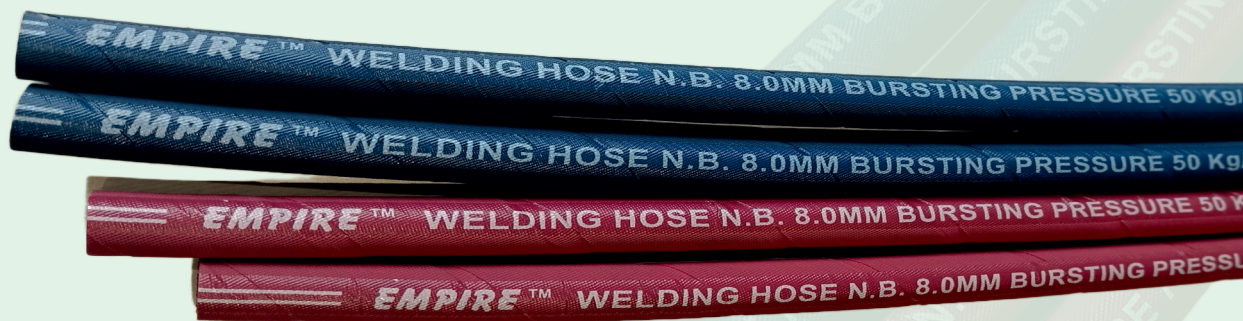

Features :

Construction : Spirally reinforced for high flexibility, smooth inner tube free from sulphur to avoid clogging of welding torch / tools. The outer cover - highly abrasive resistant.

Finish : A plain smooth, glazed - wrap finish.

Colour :

- Red for Acetylene
- Blue for Oxygen

Application :

Effectively Developed to meet the modern requirement of welding, brazing and Gas cutting application in workshops, steel plants, ship-yards, service stations,

TECHNICAL SPECIFICATIONS

NOMINAL BORE		TOLERANCE ON NOMINAL BORE IN MM	MINIMUM THICKNESS OF TUBE IN MM	MINIMUM THICKNESS OF COVER IN MM
inch	mm			
1/4	6.3	± 0.75	1.50	1.00
5/16	8	± 0.75	1.50	1.00
3/8	10	± 0.75	1.50	1.00

WORKING PRESSURE		TESTING PRESSURE		MINIMUM BURST PRESSURE	
KG/CM ²	PSI	KG/CM ²	PSI	KG/CM ²	PSI
12.5	180	25	360	50	725
12.5	180	25	360	50	725
12.5	180	25	360	50	725

BRANCHES

AHMEDABAD : Email : ahmedabad@halston.in

SURAT : Email : surat@halston.in

VIJAYWADA : Email : vijaywada@halston.in

INDORE : Email : indore@halston.in

RAIPUR : Email : raipur@halston.in

Halston
Global 

Building business with trust

(FORMERLY KNOWN AS HALSTON DISTRIBUTORS)

1st Floor, Dastur Bldg., 266, Perin Nariman Street,

Above Union Bank of India, Fort, Mumbai - 400 001 • M +91 73037 90030

E sales@halston.in • W www.halston.in